8-Gallon / Base-Mount

Single or Two Stage – Gasoline

Compressor Pump:
- Cast iron compressor pump
- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Generator:
- Brushless alternator
- Total harmonic distortion (THD) less than 5%
- 100% copper windings
- Comes standard with (2) 120V, 20A and (1) 240V, 20A receptacles (Two-stage models)

Frame:
- Powder coated 8-gallon twin tank receivers (Portable and stationary models)
- 3/16-inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard
- 13-inch flat-free tires (Two-stage portable models) (AG1-PH65-08M1 has 10-inch flat-free tires)

Components:
- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 12 or 16½-inch fly wheel
- Quality pilot valve unloader

Limited Warranties:
- 1 year Mi-T-M engine
- 2 year alternator
- 2 year pump exchange (see page 71 for more information)
- 3 Honda and Kohler engines
- 5 year Subaru engine

NEMA 5-20R, 125V

NEMA L6-20R, 240V

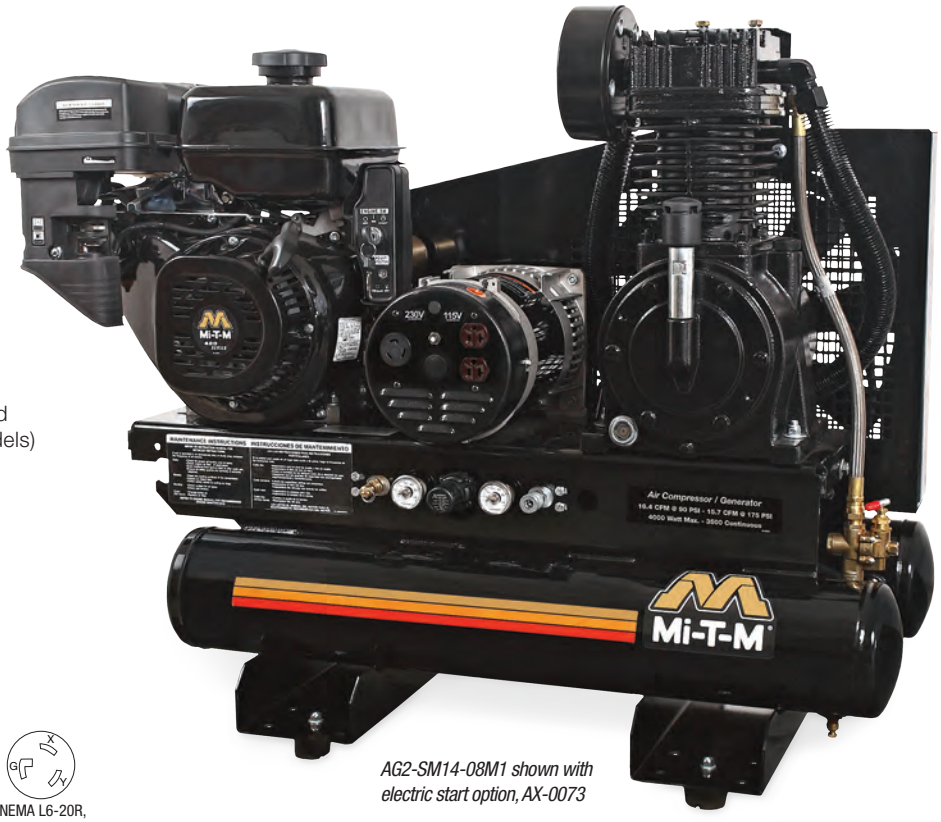

AG2-SM14-08M1 shown with electric start option, AX-0073

Increase your productivity by merging two vital pieces of equipment into one versatile machine. Ideal for every industrial application requiring both air and electrical power, you'll save space and save money with one machine.

PORTABLE MODELS			ALTERNATOR WATTAGE								
MODEL NUMBER	CFM @ 90 PSI	CFM @ PSI	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD	RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AG1-PH65-08M1	11.9	10.9 @ 125	1800 watts	600 watts	1600 watts	(2) NEMA 5-20R	196cc Honda GX200 OHV	Single stage	44.5x26x27.5in.	257 lb.	207 lb.
AG2-PH13-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	52x28x34in.	450 lb.	375 lb.
AG2-PK14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	52x28x34in.	450 lb.	375 lb.
AG2-PM14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	52x28x34in.	450 lb.	375 lb.
AG2-PS14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	404cc Subaru EX40 OHC	Two stage	52x28x34in.	450 lb.	375 lb.

STATIONARY MODELS			ALTERNATOR WATTAGE								
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD	RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AG2-SH13-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	44x22x34in.	465 lb.	365 lb.
AG2-SK14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	44x22x34in.	465 lb.	365 lb.
AG2-SM14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	44x22x34in.	465 lb.	365 lb.
AG2-SS14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	404cc Subaru EX40 OHC	Two stage	44x22x34in.	465 lb.	365 lb.

BASE-MOUNT MODELS			ALTERNATOR WATTAGE								
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD	RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AG2-SH13-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	47x22x28in.	390 lb.	325 lb.
AG2-SK14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	47x22x28in.	390 lb.	325 lb.
AG2-SM14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	47x22x28in.	390 lb.	325 lb.
AG2-SS14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	404cc Subaru EX40 OHC	Two stage	47x22x28in.	390 lb.	325 lb.

***Equipped with 150-PSI maximum rated regulator.**

8-Gallon / Base-Mount

AG2-PK14-08M1 shown with electric start option, AX-0071

Available in stationary, base-mount or portable, choose the model that best fits your needs.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS
70-0357	Engine oil drain extension	AG1-PH65-08M1
70-0358	Engine oil drain extension	Two stage Honda, Kohler & Mi-T-M models
70-0380	Engine oil drain extension	Subaru models
854-0093	Service truck mount kit - *recommended for models that are mounted in service truck applications*	Two stage portable & stationary models
AW-6000-1002	Equipment cover	All models
AX-0019	Electric start - battery, box and cables not included	Two stage Honda models
AX-0028	Lifting hook	Two stage portable & stationary models
AX-0062	Electric start - battery, box and cables not included	Subaru models
AX-0063	Lifting hook	Base-mount models
AX-0064*	Electric start - battery box and cables included, battery not included	Two stage Honda models
AX-0065*	Electric start - battery box and cables included, battery not included	Subaru models

PART NUMBER	DESCRIPTION	FITS MODELS
AX-0068	Idle down - includes electric start - battery not included	Two stage Honda models
AX-0069	Idle down - includes electric start - battery not included	Subaru models
AX-0071	Electric start - battery, box and cables not included	Kohler models
AX-0072*	Electric start - battery box and cables included, battery not included	Kohler models
AX-0073	Electric start - battery, box and cables not included	Mi-T-M models
AX-0074*	Electric start - battery box and cables included, battery not included	Mi-T-M models
AX-0075	Idle down - includes electric start - battery not included	Mi-T-M models
IX-0055	Remote start/choke; 6-ft. wire extension for key switch; you will also need to order electric start option, AX-0019 or idle down option, AX-0068	Two stage Honda models

Note: Battery box cannot be mounted at the factory but can be shipped with the unit for custom mounting. Consult factory for more information.