


Single-Axle Trailers

Mi-T-M Single and Dual-Axle Trailer units are fully integrated and self-contained systems that are designed with a large supply tank for working at remote sites where water is not accessible. Customize to fit your application needs with a high quality Mi-T-M pressure washer to get large jobs done quickly wherever you may need to work.

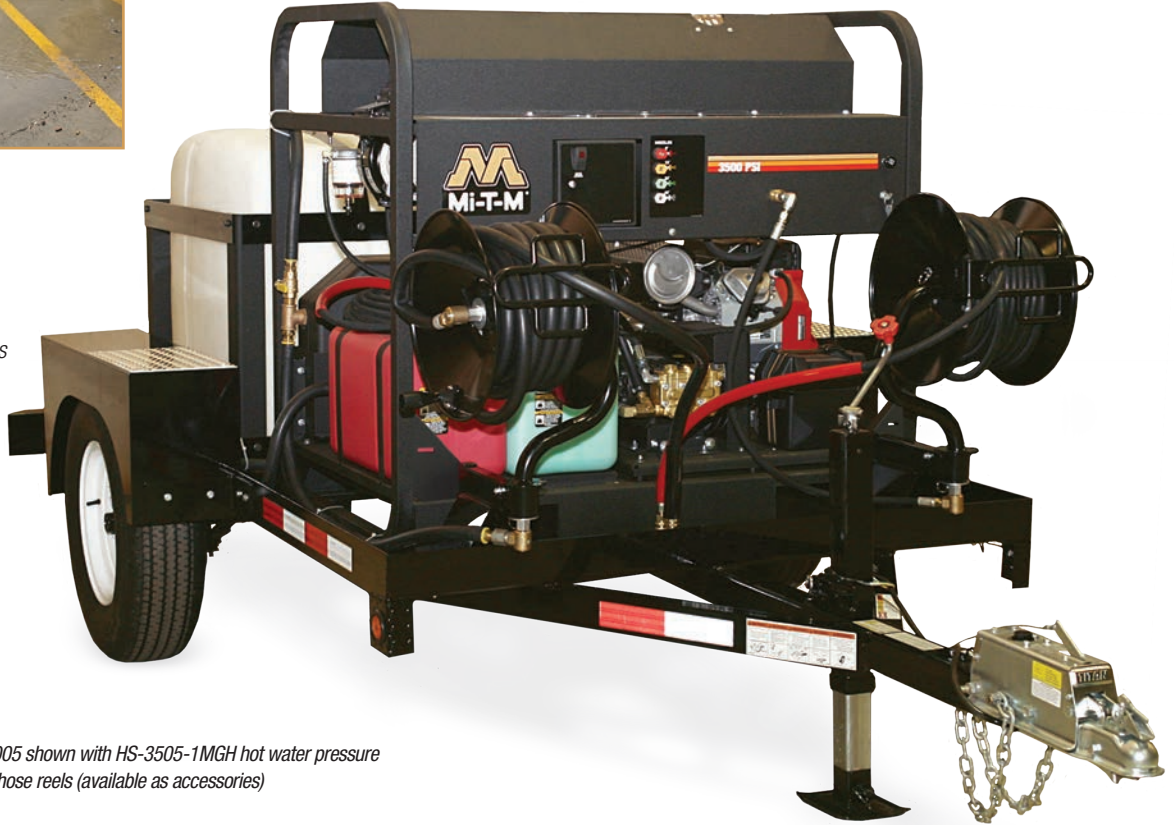

Features

- Swivel jack with pad
- Rubber mounted sealed lights
- Tank is enclosed in a powder coated steel frame
- Will fit all Mi-T-M pressure washers
- Aluminum treadplate steps for access to water tank

Accessories

- Pressure washers
- Hose reels

To see more online, scan here or go to www.mitm.com:



AW-9000-0005 shown with HS-3505-1MGH hot water pressure washer and hose reels (available as accessories)

MODEL NUMBER	WATER TANK	BRAKES	COUPLER	TIRES	AXLES	TRAILER DECK PLATE	ANGLE FRAME	TRAILER BED DIM.	GROSS VEHICLE WT.
AW-9000-0005	200-gallon	Surge	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.
AW-9000-0006	200-gallon	Electric	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.
AW-9000-0007	200-gallon	None	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.

Trailer Options for Single & Dual-Axle Trailers

High Pressure Hose Reel Options

These high pressure hose reel options include a hose reel with jumper hose and mounting bracket.

TX-0001 (13-inch reel)

TX-0002 (16-inch reel)

Low Pressure Hose Reel Option

This low pressure hose reel option includes a hose reel with mounting bracket and plumbing.

TX-0003 (16-inch reel)

Back-Flow Preventors

The back-flow preventor is required on trailer units in California.

TX-0011

- Adds the backflow preventor to dual-axle trailers, AW-9000-0003 and AW-9000-0004 and single-axle trailers that have the TX-0003 low pressure hose reel option
- Mounts to hose reel or inlet plumbing on trailer

TX-0012

- Adds the backflow preventor to single-axle trailers that do not have the TX-0003 low pressure hose reel option
- Mounts to inlet plumbing on trailer

Trailer Tank Bypass

TX-0005 (Dual-axle trailer tank bypass, for use with HS Series)

TX-0007 (Single-axle trailer tank bypass, for use with HS Series)

- Removes the float system, while adding the necessary plumbing
- Water bypasses back to water tank

Replacement Hose Reel Parts

When adding hose reels to the single or dual-axle trailers, use the following jumper hose and mounting bracket.

15-0159 (Jumper hose)

13-0179A01 (Mounting bracket)

50-0195 (13-inch hose reel, 150-foot maximum hose length)

50-0196 (16-inch hose reel, 200-foot maximum hose length)

Trailer Hitches

This specially designed heavy-duty, 2-inch trailer hitch has a pin-style securing mechanism and hinged ball socket with visual indication of proper closure around the ball - all to ensure a quick, easy and secure hook-up. Includes hitch with brackets and hardware.

TX-0009 (For use with single-axle trailers)

TX-0010 (For use with dual-axle trailers)

Dual-Axle Trailers

To see more online, scan here
or go to www.mitm.com:



AW-9000-0008 shown with TX-0010 trailer hitch and HS-3006-OMDK hot water pressure washer and hose reel (available as accessories)

Features

- Swivel jack with pad
- Rubber mounted sealed lights
- Tanks are enclosed in a powder coated steel frame
- Will fit all Mi-T-M pressure washers
- Aluminum treadplate steps for access to water tank
- Storage area located under the water tanks (AW-9000-0003 & AW-9000-0004 models)
- (2) 200-gallon water tanks are plumbed together (AW-9000-0003 & AW-9000-0004 models)

Accessories

- Pressure washers
- Hose reels



AW-9000-0003 has storage area located under water tanks



AW-9000-0003 shown with HS-3505-1MGH hot water pressure washer and hose reels (available as accessories)

MODEL NUMBER	WATER TANK	BRAKES	COUPLER	TIRES	AXLES	STORAGE AREA	TRAILER DECK PLATE	ANGLE FRAME	TRAILER BED DIM.	GROSS VEHICLE WT.
AW-9000-0003	(2) 200-gallon	Surge	2in.	(4) ST205-75R 15in.	(2) 3,500 lb.	5ft.x4ft.x12in.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	7,000 lb.
AW-9000-0004	(2) 200-gallon	Electric	2in.	(4) ST205-75R 15in.	(2) 3,500 lb.	5ft.x4ft.x12in.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	7,000 lb.
AW-9000-0008	(1) 200-gallon	Surge	2in.	(4) ST205-75R 15in.	(2) 3,500 lb.	None	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	7,000 lb.

As a company that continually strives to seek advancements in technology, the design of Mi-T-M trailers may change after the publication of this catalog.